

## Technical Information


**Polymer ST 48****Low modulus sealants for construction according to ISO 11600 F&G 25 LM/25 HM****Applications**

Polymer ST 48 is especially recommended for the application as sealant for interior or exterior joints, e. g. expansion or connection joints, interior joints for dry walling, joints at staircases.

**Technical properties (no specification data)**

Appearance	colourless, transparent
Viscosity	approx. 60,000 mPas
Plasticizer	phthalate
Tensile strength in formulation*	1 N/mm <sup>2</sup>
Elongation in formulation*	600 %
Modulus 100 % in formulation*	0.3 MPa

\*formulation available upon request

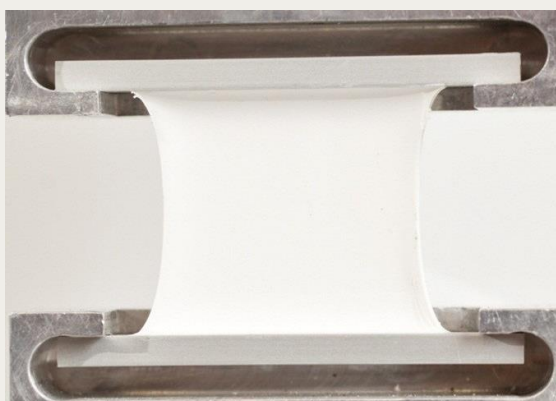**Benefits**


Polymer ST 48 offers a good handling viscosity and is therefore easy to apply manually. Formulation surfaces are quickly tack-free after application, which ensures rapid processing and avoids long waiting times.

Furthermore, it is possible to produce tin-free formulations.

Polymer ST 48 shows excellent adhesion to concrete, wood, glass and different metals.

Showing a good stress-strain behaviour makes Polymer ST 48 suitable for low modulus formulations according to ISO 11600 F&G 25LM/25HM.

## Polymer ST 48 for low modulus construction sealants

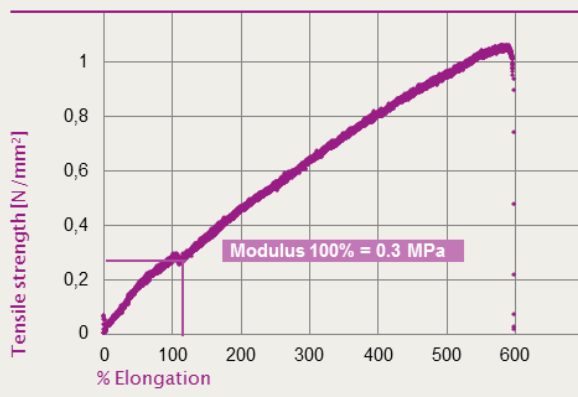

### Processing

For the right choice of raw materials, especially when it comes to fillers as e. g. CaCO<sub>3</sub>, it is re-commended to use products at lowest water content. Fillers can be pre-dried at higher temperatures before use.

The temperature of the product containers should not vary too greatly from the surrounding temperature, as water could condense and contaminate the product. This is of importance especially when raw materials are stored outside during winter time.

It is necessary to keep all equipment used for processing clean and dry. Surfaces can be cleaned with volatile solvents such as acetone, if necessary.

The product is activated for reaction once the catalyst is added, i.e. the product starts curing when it comes in contact with moisture. Afterwards, it must therefore be kept in dry and closed containers.

### Packaging

950 kg IBC

Samples: 1-l-aluminum bottle

### Shelf life

In closed containers stable for 12 months at temperatures up to 104 °F (40 °C).

### Registration status

The ingredients of Polymer ST 48 are listed in the following chemical inventories:

EINECS/ELINCS, TSCA, DSL, PICCS, TCSI

Further information is available on request.

07/2019

This information and any recommendations, technical or otherwise, are presented in good faith and believed to be correct as of the date prepared. Recipients of this information and recommendations must make their own determination as to its suitability for their purposes. In no event shall Evonik assume liability for damages or losses of any kind or nature that result from the use of or reliance upon this information and recommendations. EVONIK EXPRESSLY DISCLAIMS ANY REPRESENTATIONS AND WARRANTIES OF ANY KIND, WHETHER EXPRESS OR IMPLIED, AS TO THE ACCURACY, COMPLETENESS, NON-INFRINGEMENT, MERCHANTABILITY AND/OR FITNESS FOR A PARTICULAR PURPOSE (EVEN IF EVONIK IS AWARE OF SUCH PURPOSE) WITH RESPECT TO ANY INFORMATION AND RECOMMENDATIONS PROVIDED. Reference to any trade names used by other companies is neither a recommendation nor an endorsement of the corresponding product, and does not imply that similar products could not be used. Evonik reserves the right to make any changes to the information and/or recommendations at any time, without prior or subsequent notice.

**Evonik Nutrition & Care GmbH**  
Charlottenburger Straße 9  
21502 Geesthacht, Germany  
Phone +49 4152 8092-0  
Fax. +49 4152 79156  
[nano-and-silicone-technology@evonik.com](mailto:nano-and-silicone-technology@evonik.com)  
[www.evonik.com/nano-and-silicone-technology](http://www.evonik.com/nano-and-silicone-technology)

